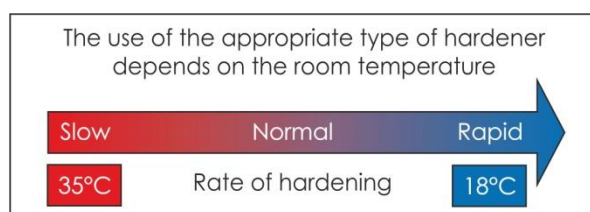


**TECHNICAL DATA SHEET  
HARDENER SYMACRYL  
R350 ULTRA HS**The identification code: S-UR350  
Line: SYMACRYL**PRODUCT DESCRIPTION**

This is a special hardener, composed for SYMACRYL R350 clearcoat [code: S-LBR350]. Application in a ratio of 1:2 with clearcoat.

**TYPES OF HARDENER**

- slow

- normal (whole cars)

- rapid (1 - 2 elements)

The type of used hardener affects coating drying time and depends on room temperature and the preference of the painter. Proper selection of the type of hardener ensures appropriate structure and appearance of coating.

**RULES OF CONDUCT**

Please note that after opening the container with a hardener and mixing it with clearcoat, you should immediately close it to prevent the hardening reaction in contact with air.

**STORAGE TIME AND CONDITIONS**

Store in tightly closed containers, in a cool, dry place away from sources of fire and heat. Avoid exposure to sunlight. Expiration date: 6 months from date of manufacture - date on the top of container.

**CLEANING EQUIPMENT**

For cleaning equipment can be used acryl thinner [code: E-RA] or nitro thinner [code: E-RN]. It is recommended to use thinner for cleaning paint spray guns EXLAK [code: E-RDMP].

**HEALTH AND SAFETY REGULATIONS**

See Safety Data Sheet of the product.

**SPECIFIC WEIGHT**

About 1.0 g/cm<sup>3</sup>